

5 位數頻率錶

5 DIGITAL FREQUENCY METER

MODEL
MF



■特點(FEATURES)

- .精確度0.01%滿刻度 (Accuracy 0.01% F.S.)
- .可量測 交流頻率/直流脈波頻率
(Measuring AC Frequency,Pulse(TTL,CMOS) Frequency)
- .最大輸入頻率 50KHz(Accepts input rates up to 50KHz)
- .小數點位置可任意規劃(Decimal point can be modified)
- .尺寸小,穩定性高(Dimension small and High stability)

1.MODEL:MF-□□□

NO	Input Frequency	NO	Input Level	NO	Aux. Power
A	0-99.999 Hz	1	Pulse(TTL)	A	AC110V/220V
B	0-999.99 Hz	2	Pulse(CMOS)	B	DC24V
C	0-9999.9 Hz	3	AC 2-60V	C	DC48V
D	0-49999 Hz	4	AC 20-600V	D	DC110V
E	SPECIFIED	9	SPECIFIED	O	SPECIFIED


. ±20% of rate less
3VA for AC input
. ±20% of rate less
3 WATT for DC input

2:SPECIFICATION (主要規格)

- . Measuring accuracy : 0.01% F.S. (23 ± 5)
(精確度)
- . Sampling time : 10 cycles/sec. (>10Hz)
(取樣時間) f cycles/sec. (<10Hz)
- . Input impedance : 2 Mohm or more
(輸入阻抗)
- . Over input indication : " doFL "
(過載顯示)
- . Readout range : 0-99999 digit adjustable
(顯示值範圍)
- . Parameter setting : Touch switches
(參數設方式)
- . Max. input over : 1.5 x rated continuous
(過載能力) 2 x rated 30 seconds
- . Display : Red high efficiency LEDs high 14.22mm (.56")
(顯示幕)
- . Dielectric strength : 2KVac/1 min. (input/power)
(絕緣耐壓能力)
- . Surge test : ANSI C37.90a/1974, DIN-IEC255-4
(突波測試) impulse voltage 4KV (1.2 x 50us)
- . Operating condition : 0-50 (20 to 90% RH non-condensed)
(使用環境條件)
- . Storage condition : 0-70 (20 to 90% RH non-condensed)
(存放環境條件)

3.OUTSIDE DIMENSION AND CONNECTION DIAGRA

(外型尺寸與開孔尺寸與配線圖)

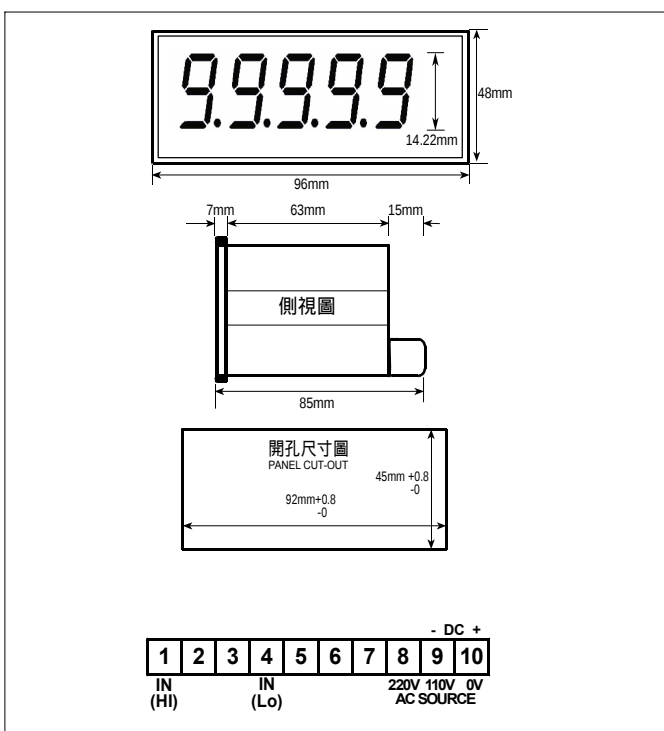

4.Ordering information (訂購方式)

MODEL:MF-B4A

- . Input Frequency : 0-999.99Hz
(輸入頻率範圍)
- . Input Level : AC 20-600V
(輸入信號範圍)
- . Aux. power supper : AC110V or 220V ± (50 or 60Hz)
(輔助電源)