




BILGE LEVEL SWITCH BLG 250

The Bilge Switch Model BLG250 is designed to be installed in ships bilges and tanks, industrial sumps and tanks where it would be bolted to an adjoining structure. This switch is primarily stainless steel construction with a hermetically sealed SPDT reed switch potted in epoxy. This switch is also designed with a special feature, a manual lift/pull test mechanism to be used in the field to determine if the switch is operational. This DNV approved switch is very durable and designed to tolerate harsh conditions.

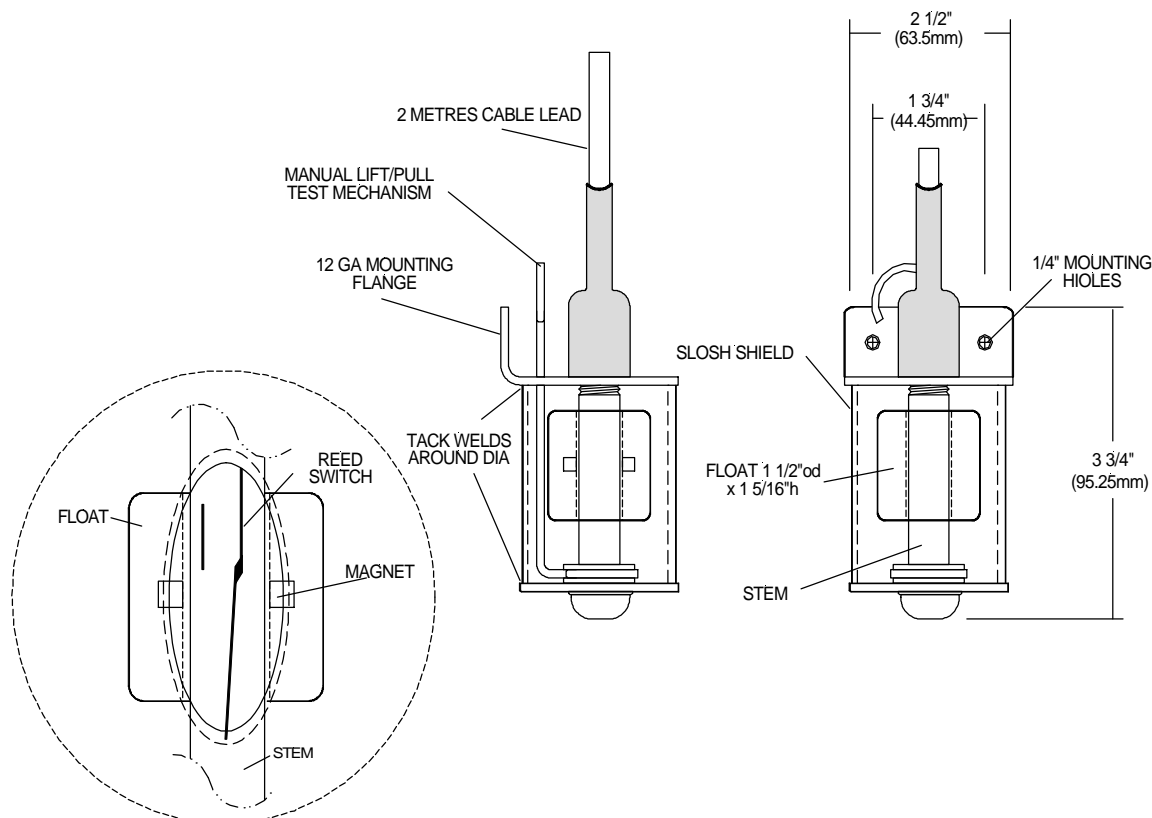

Max Temp: 250°F
Max PSIG: 200
Float SG: 0.62
Max Rating: 100* W ac/dc
Max Volts: 120 ac/dc
Switch rating: 100VA, SPDT

WIRING

White = Common
Black = Normally Closed
Green = Normally Open

*Max Watt resistive load = 25W
 Max Watt inductive load = 12.5W

NOTE: *The actuation point will vary on the temperature and specific gravity of the individual liquid being detected*

PSM Instrumentation Limited Burrell Road, Haywards Heath, W Sussex RH16 1TW UK
 Phone 44 (0) 1444 410040 Fax 44 (0) 1444 410121
[Http://www.psm-sensors.co.uk](http://www.psm-sensors.co.uk) email:sales@psm-sensors.co.uk